



3.1

Pressure relief valve direct operated

Type DBD...10

Sizes 6 to 30
up to 400 bar
up to 330 L/min




Contents

Function and configuration	02
Ordering code	03
Technical data	03
Characteristic curves	04
Unit dimensions	05-07

Features

- 3 connected versions
- Inserted cartridge
- Threaded connection
- Sub-plate mounting
- 6 pressure ratings
25, 50, 100, 200, 315, 400 bar
- 2 adjustment versions
- Adjusting bolt with protective cap
- Regulating handle

Symbol



Function and configuration


The DBD pressure relief valves are direct operated, used to limit the pressure of hydraulic system. It comprises the sleeve (1), spring (2), poppet spool with damping (3) and pressure adjustment element (4). The system pressure may be set infinitely by the adjustment element. The spring (2) presses poppet spool (3) onto the valve seat. The channel P is connected to the system and the system pressure affect on the area of poppet spool.

If the pressure in channel P rises in excess of the value set at the spring (2), the poppet spool (3) will opens against the spring (2). The pressure oil flows from channel P to channel T. The stroke of the spool is limited by spin shaft (5).

To gain accurate setting value within the whole pressure range, the pressure scope is divided into 6 pressure ratings, and every rating has a corresponding spring which may be set maximum pressure.

03

Type DBDS...K. 10/...
pressure stages 25 to 400bar

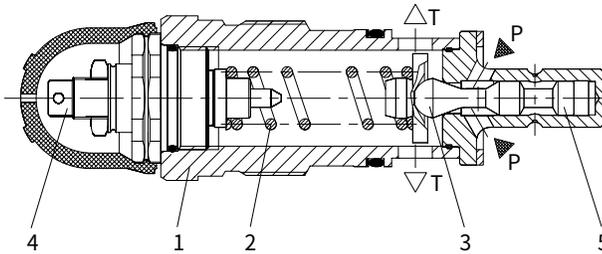

Notes:

Pressure relief valves, direct operated, type DBD has low internal leakage, and higher pressures at flow, and are suitable as a safety valve. Choose pilot operated pressure relief valves if lower adjustable pressure with low internal leakage is needed.

Ordering code


	DBD				10 / /		*		
Pressure relief valve, Direct operated								Further details in clear text	
Adjusting bolt with protective cap =S								No code = NBR seals V = FKM seals	
Regulating handle =H								For threaded connection valve No code = Inch 2 = Metric	
Connection		G	K	P					
Nominal size	6=	6	6	6					
	8=	8	-	-					
	10=	10	10	10					
	15=	15	-	-					
	20=	20	20	20					
	25=	25	-	-					
	30=	30	30	30	Size				
Connection version									
Inserted cartridge =K									
Threaded connection =G									
Sub-plate mounting =P									
								10=	10 series
Size		10	6, 8, 15 and 20	25 and 30					
Pressure ratings (up to...)	2.5=25bar	2.5=25bar	2.5=25bar	2.5=25bar					
	5=50bar	5=50bar	5=50bar	5=50bar					
	10=100bar	10=100bar	10=100bar	10=100bar					
	20=200bar	20=200bar	20=200bar	20=200bar					
	31.5=315bar	31.5=315bar	31.5=315bar	31.5=315bar					
	40=400bar	40=400bar	40=400bar	40=400bar					

Technical data


Fluid		Mineral oil suitable for NBR and FKM seal			
		Phosphate ester for FKM seal			
Fluid temperature range		°C	-30 to +80 (NBR seal)		
			-20 to +80 (FKM seal)		
Viscosity range		mm ² /s	10 to 800		
Degree of contamination		Maximum permissible degree of fluid contamination: Class 9. NAS 1638 or 20/18/15, ISO4406			
Nominal size		6 and 8	10	15 and 20	25 and 30
Operating pressure range	Inlet	bar	Up to 400	up to 400	up to 400
	Outlet	bar	315		
Max. flow-rate		L/min	See the Characteristic curve		

Performance curves (Measured at $\vartheta_{oil} = 40^{\circ}\text{C} \pm 5^{\circ}\text{C}$, using HLP46)


Size 6

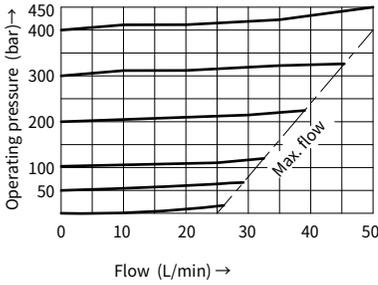


Sizes 8 and 10

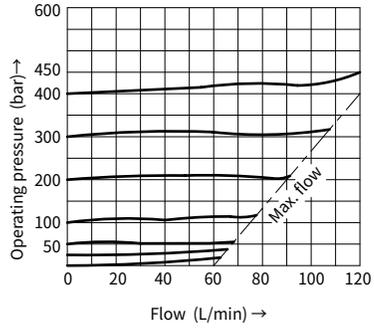

Sizes 15 and 20

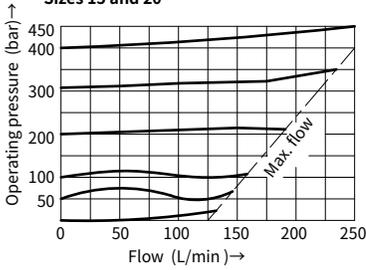


Sizes 25 and 30

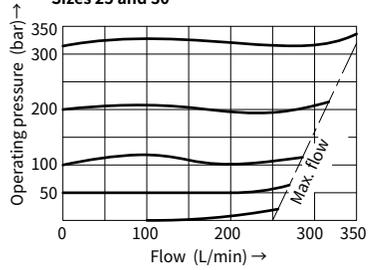

Unit dimensions


(Dimensions in mm)

• Cartridge cavity

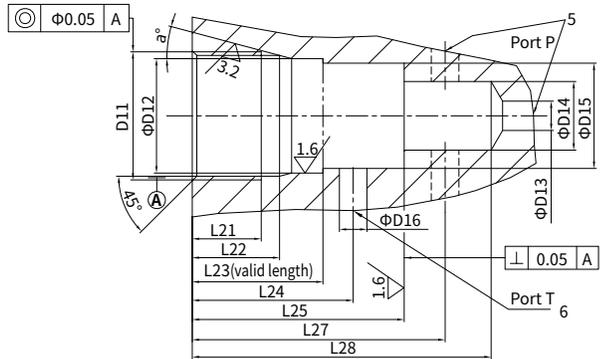

• Inserted valve

- 1 Adjustment element "S"
- 2 Adjustment element "H"
(use pressure adjustment handwheel for sizes 25 and 30)
- 3 Steel seal (type, size)
- 4 Internal hexagon screw S=6 for under size 20 (SW4) and external hexagon S=13 for above size 25 (Sw5)
- 5 Port P, arranged optionally around periphery or bottom
- 6 Port T, arranged optionally around periphery

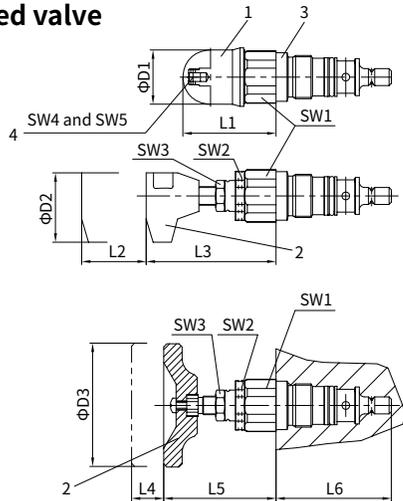


Size	Weight (kg)	D1	D2	D3	L1	L2	L3	L4	L5	L6	SW1	Torque(Nm)	SW3	SW4	SW5
6	Approx. 0.4	34			72		88	-	-	64	32	80	19	6	-
10	Approx. 0.5	38	60	-	68	11	79			75	36	150			
20	Approx. 1	48			65		77			106	46	250			
30	Approx. 2.3	63	-	80	83	-	-	11	56	131	60	450			13
Size	D11	D12	D13	D14	D15	D16	L21	L22	L23	L24	L25	L27	L28	alpha	
6	M28×1.5	25H9	6	15	24.9	6	15	19	39	35	45	56.5±5.5	65	15	
10	M35×1.5	32H9	10	18.5	31.9	10	18	23	35	41	52	67.5±7.5	80		
20	M45×1.5	40H9	20	24	39.9	20	21	27	45	54	70	91.5±8.5	110	20	
30	M60×2	55H9	30	38.75	54.9	30	23	29		60	84	113.5±11.5	140		

Unit dimensions

(Dimensions in mm)

• Threaded connection valve

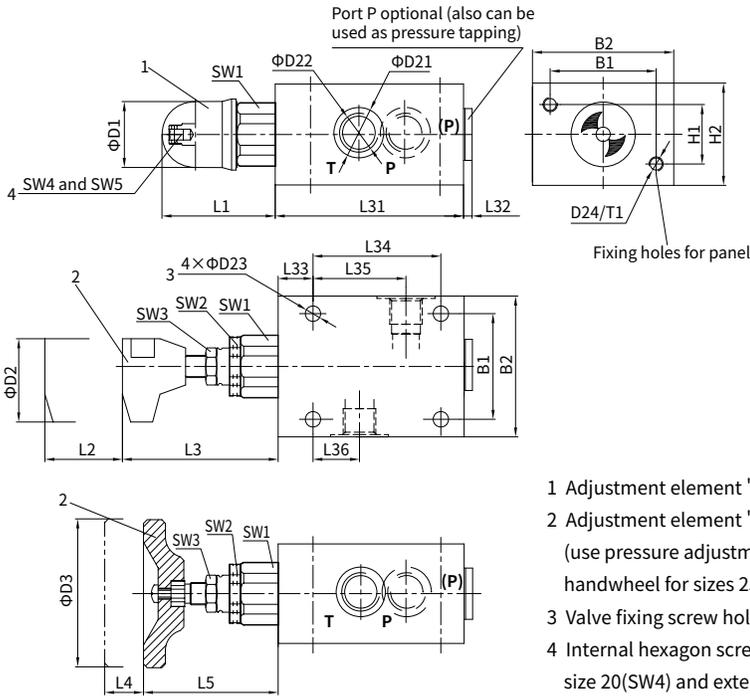


- 1 Adjustment element "S"
- 2 Adjustment element "H" (use pressure adjustment handwheel for sizes 25 and 30)
- 3 Valve fixing screw hole
- 4 Internal hexagon screw S=6 for under size 20(SW4) and external hexagon S=13 for above size 25 (SW5)

Size	Weight(kg)	B1	B2	D1	D2	D3	D21	D22					D23	D24					
6	Approx. 1.6	45	60	34			25	G1/4; M14×1.5					6.6	M6					
(8)+10	Approx. 3.7	60	80	38	60	-	(28) 34	G3/8 M18×1.5; G1/2 M22×1.5					9	M8					
(15)+20	Approx. 6.9	70	100	48			(42) 47	G3/4 M27×2; G1 M33×2											
(25)+30	Approx. 15.2	100	130	63	-	80	(56) 61	G1 1/4 M42×2; G1 1/2 48×2					11	M10					
Size	L1	L2	L3	L4	L5	L31	L32	L33	L34	L35	L36	SW1	SW2	SW3	SW4	SW5	H1	H2	T1
6	72		83			80	2	15	55	40	20	32					25	40	10
(8)+10	68	11	79			100	(2) 3		70	49	21	36	30	19	6	-	40	60	20
(15)+20	65		77			135	(3) 4		20	100	65	34	46				36	50	
(25)+30	83	-	-	11	56	180	4	25	130	85	35	60	46		-	13	60	90	25

Unit dimensions

(Dimensions in mm)

• Sub-plate mounting valve

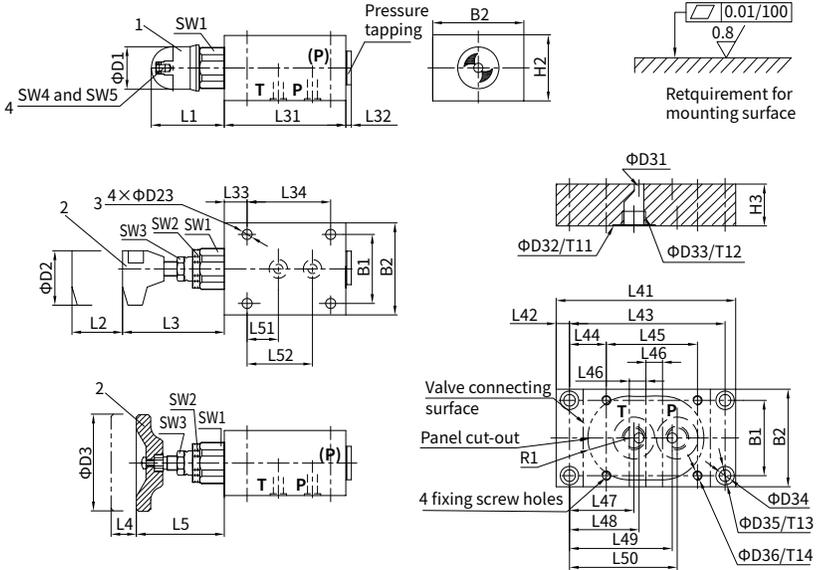

Size	O-ring (P and T)	Dimension of pressure tapping	Valve fixing hole (GB/T70.1-10.9)	Torque(Nm)
6	8.75×1.8	G1/4	M6×50	Approx.10
10	12.3×2.4	G1/2	M8×70	Approx.25
20	22×3	M27×2	M8×90	
30	34×3	M42×2	M10×110	Approx.50

- 1 Adjustment element "S"
- 2 Adjustment element "H"(Sizes 25 and 30 use pressure adjustment handwheel)
- 3 Valve fixing screw hole
- 4 Internal hexagon screw S=6 for under size 20(SW4) and external hexagon S=13 for above size 25 (SW5)

Size	Weight (kg)	B1	B2	D1	D2	D3	D23	H2	L1	L2	L3	L4	L5	L31	L32	L33	L34	SW1	SW2	SW3	SW4	SW5													
6	Approx.1.6	45	60	34	60	-	6.6	40	72	11	83	-	-	80	2	15	55	32	30	19	6	-													
10	Approx. 3.7	60	80	38																			9	60	68	79	-	-	100	3	20	70	36	46	46
20	Approx. 7.1	70	100	48																															
30	Approx. 15.7	100	130	63	-	80	11	90	83	-	-	11	56	180	4	25	130	60	46	-	13														
Size	Sub-plate type					Weight (kg)		D31		D32		D33		D34		D35		H3		L41															
6	G300/1					约 1.5		6		25		G1/4		7		11		25		110															
10	(G301/1) G302/1					约 2		10		(28) 34		(G3/8) G		-		-		-		135															
20	(G303/1) G304/1					约 5.5		(15) 20		(42) 47		(G3/4) G1		11.5		17.5		40		170															
30	(G305/1) G306/1					约 8		30		(56) 61		(G1 1/4) G11/2		11.5		17.5		40		190															
D36	L42	L43	L44	L45	L46	L47	L48	L49	L50	L51	L52	T11	T12	T13	T14	R1																			
M6	8	94	22	55	10	39	42	62	65	20	40	1	15	9	15	25+2																			
	10	115	27.5	70	12.5	40.5	48.5	72.5	80.5	21	45		(15) 16			40+3																			
	15	140	20	100	20	(45)42	54	85	(94)97	34	65		20			13	(12) 22	40+3																	
M10	12.5	165	17.5	130	22.5	42	52.5	102.5	(113)117	35	85	24	11.5	22	55+4																				

China

+86 400 101 8889

America

+01 630 995 3674

Germany

+49 172 3683463

Japan

+81 03 6809 1696



© This brochure can be reproduced, edited, reproduced or transmitted electronically without the authorization of Hengli Hydraulic Company. Due to the continuous development of the product, the information in this brochure is not specific to the specific conditions or applicability of the industry, thus, Hengli does not take any responsibility for any incomplete or inaccurate description.