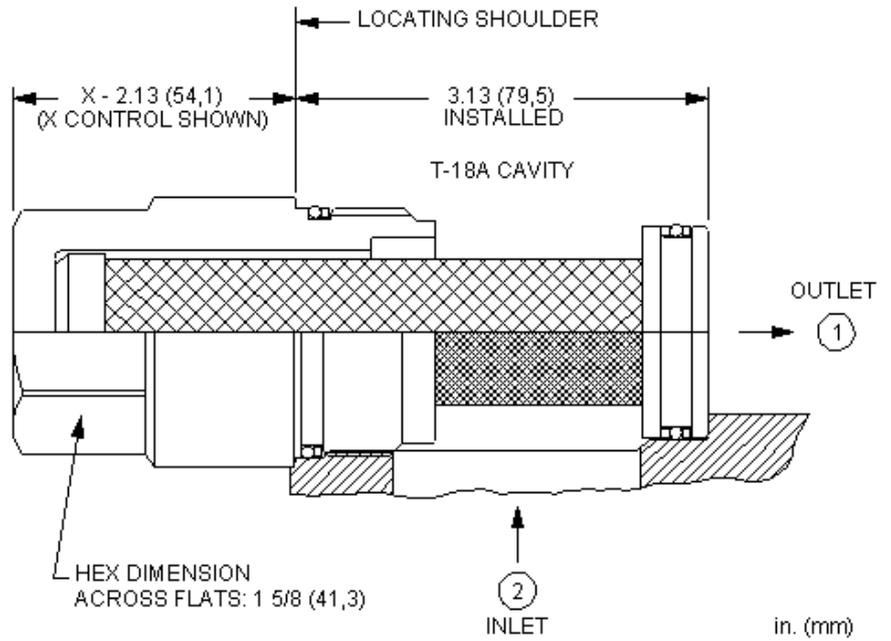

CONFIGURATION

X	Control	Not Adjustable
A	Filter Rating	3 Micron Nominal (Depth type)
E	Seal Material	EPDM
(none)	Material/Coating	



Sun filter elements are available as Surface Type (Last Chance) and Depth Style elements. The flow path is Port 2 to Port 1 and should not be used in reverse, even with a reverse free flow check valve installed. The elements have a high collapse pressure and are intended to be used in line with the system. Filter life will depend on initial system cleanliness and the amount of dirt ingress to the system when operating.

TECHNICAL DATA

NOTE: DATA MAY VARY BY CONFIGURATION. SEE CONFIGURATION SECTION.

Cavity	T-18A
Series	4
Capacity	80 gpm
Maximum Operating Pressure	5000 psi
Valve Hex Size	1 5/8 in.
Valve Installation Torque	350 - 375 lbf ft
Seal kit - Cartridge	Buna: 990018007
Seal kit - Cartridge	EPDM: 990018014
Seal kit - Cartridge	Polyurethane: 990018002
Seal kit - Cartridge	Viton: 990018006
Model Weight	2.72 lb.

- NOTES**
- Capacity rating is dependent on the micron rating of the element. Stated flow capacity in the Technical Data table is based on the 40 micron rating. See performance curves.
 - See Related Accessories for replacement elements.

CONFIGURATION OPTIONS
Model Code Example: FLJAXAE

CONTROL	(X) FILTER RATING	(A) SEAL MATERIAL	(E) MATERIAL/COATING
X Not Adjustable	A 3 Micron Nominal (Depth type)	E EPDM	Standard Material/Coating
	B 10 Micron Nominal (Depth type)	N Buna-N	/AP Stainless Steel, Passivated
	C 25 Micron Nominal (Depth type)	V Viton	/LH Mild Steel, Zinc-Nickel
	D 40 Micron Nominal (Surface type)		
	Z 1 Micron Nominal (Depth type)		

TECHNICAL FEATURES

- Differential crush pressure is 3000 psid (210 bar).
- The flow path is Port 2 to Port 1 only.
- Installation directly above the subplate will protect the entire valve stack from particles.
- Cartridges configured with EPDM seals are for use in systems with phosphate ester fluids. Exposure to petroleum based fluids, greases and lubricants will damage the seals.
- Surface type element features a 304 stainless steel mesh media. All internal components are 304 stainless steel.
- Surface Type elements have a 40 micron nominal rating (63 micron absolute).
- Surface Type (Last Chance) elements have a single layer stainless steel mesh supported by perforated sheet tube.
- Surface Type elements are designed to capture errant particles that may not be trapped in the main system filter or particles resulting from a component failure.
- With a correctly assembled system, Surface Type elements will be unnoticed during regular operation, but will provide protection from sudden component failure.
- Depth type elements are available in 1 μm , 3 μm , 10 μm , and 25 μm nominal ranges.
- 1, 3, 10, and 25 micron elements have a Beta ratio as shown in the Performance Curves tab.
- Depth Type elements feature a pleated microglass media with clear zinc coated components.

PERFORMANCE CURVES

FILTRATION RATIO PER ISO 16889				
MICRON RATING	$B_{X(C)} \geq 75$ (98.7%)	$B_{X(C)} \geq 100$ (99.0%)	$B_{X(C)} \geq 200$ (99.5%)	$B_{X(C)} \geq 1000$ (99.9%)
1	<4.0	<4.0	<4.0	4.2
3	<4.0	<4.0	<4.0	4.8
10	6.8	7.1	8.0	10.0
25	16.3	17.1	19.0	24.0

